


MOTOREDUKTOR: NMRV-090-80B14

WIDOK 3D




DANE TECHNICZNE I WYMIARY

GR Size	090
PAM Input PAM flange	80 B14
ACU Output hole shaft (d)	35
VB Double input shaft	NO
TFU Output flange gear unit 2	NO
DFU Output flange dimension (d)	-
PFU Output flange position	-
AL Output hole shaft (d)	NO
PAL Output shaft position	-
BR Torque arm	NO
PBR Torque arm position	-
CAP Cover	NO
TIP Motor type	T-Three phase
GRA Motor size	080
RAF Cooling	IC411-Self-Ventilated
FC Motor execution	B14
TF Break type	-
AF Brake power supply	-
COP Terminal box cover	Aluminium
CVE Fan cover	Standard
MOR Terminal box cover position	1
A	140
AC	158
B	50
B1	8
BB	10
BM	6
BM1	6
D	35(38)
D1	24

DM	19
DM1	19
E	40
F	M8
FF	M6x16
G	129.5
G1	140
H	103
I	90
K	100
KE	M10x18(8)
L	130
LB	232.5
LL	272.5
M	130
N	110
N1	67
O	13
P	160
PM	120
PM1	120
Q	102
R	135
S	11
T	45
T1	27
TM	21.8
TM1	21.5
TT	38.3(41.3)
V	70
W	45°

WIDOK 2D

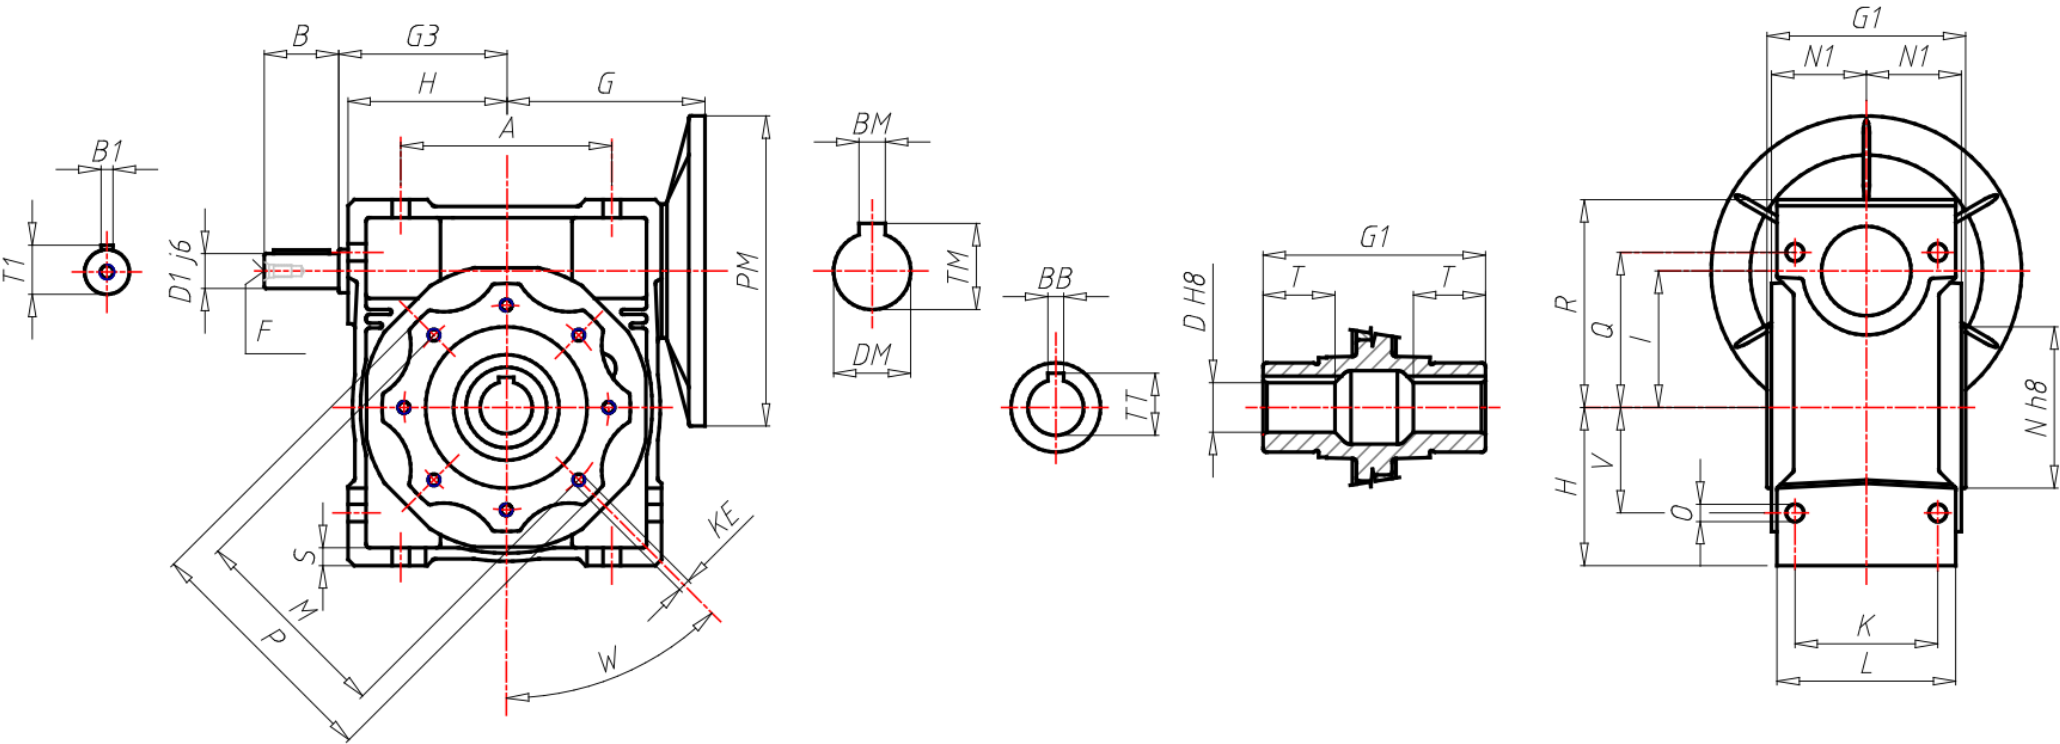

AKCESORIA

